
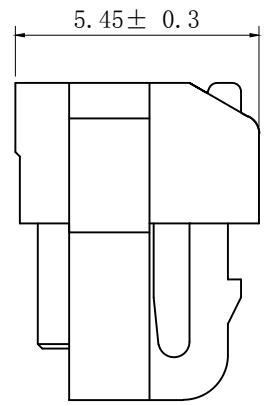
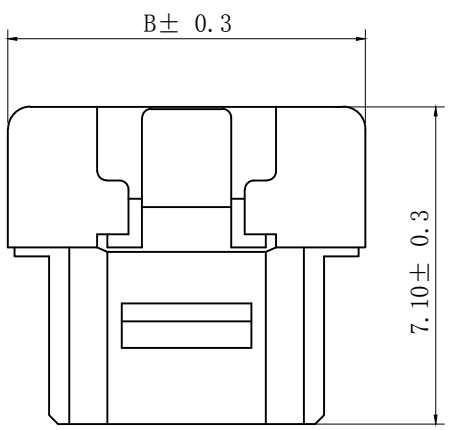


版次		日期		内 容	

Electrical properties

- 1、Current rating: 1A AC\DC
- 2、Voltage rating: 50V AC\DC
- 3、Temperature range: -25°C to 85°C
- 4、Contact resistace:Initial value/20mΩ max
- 5、Insulation resistance:100MΩ min
- 6、Withstanding voltage:250V AC/ minute
- 7、Material : PBT UL94V-0

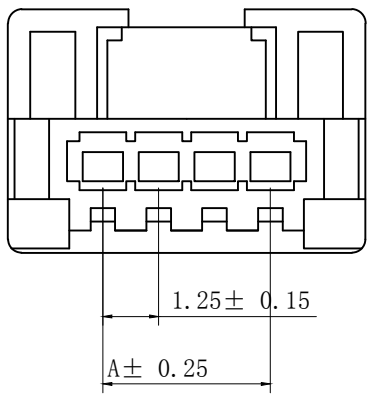

孔位 poles	A	B
2	1.25	5.60
3	2.50	6.85
4	3.75	8.10
5	5.00	9.35
6	6.25	10.60
7	7.50	11.85
8	8.75	13.10
9	10.00	14.35
10	11.25	15.60
11	12.50	16.85
12	13.75	18.10
13	15.00	19.35
14	16.25	20.60
15	17.50	21.85

浙江乐马电气有限公司			设计	张书晨	
尺寸公差	角度公差	品名: 502380-nY	图号: 12503-Y	审核	王佳
.X ±0.25	X.° ±3.0°			批准	陈其林
.XX ±0.15	.X° ±2.0°				
.XXX ±0.05	.XX° ±1.0°	单位: mm	比例: --	页数: 1/1	版本: A