
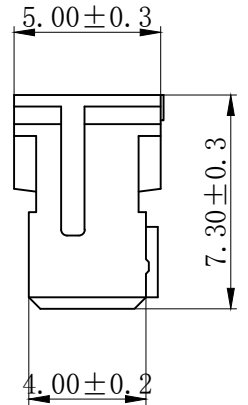
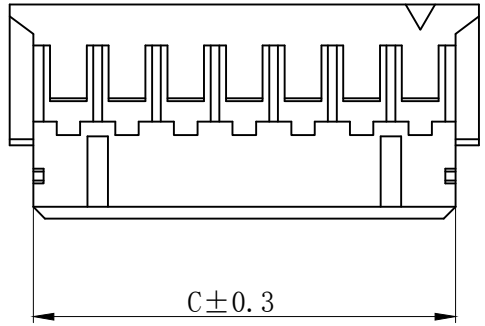


版次	日期	内 容

Electrical properties

- 1、 Current rating: 3A AC\DC
- 2、 Voltage rating: 250V AC\DC
- 3、 Temperature range: -25°C to 85°C
- 4、 Contact resistance: Initial value/20mΩ max
- 5、 Insulation resistance: 1000MΩ min
- 6、 Withstanding voltage: 800V AC/ minute
- 7、 Material : Nylon UL94V-0(2)

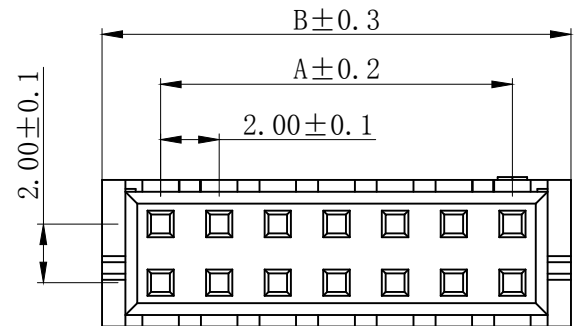

孔位 poles	A	B	C
2X2	2.0	6.0	4.6
2X3	4.0	8.0	6.6
2X4	6.0	10.0	8.6
2X5	8.0	12.0	10.6
2X6	10.0	14.0	12.6
2X7	12.0	16.0	14.6
2X8	14.0	18.0	16.6
2X9	16.0	20.0	18.6
2X10	18.0	22.0	20.6
2X11	20.0	24.0	22.6
2X12	22.0	26.0	24.6
2X13	24.0	28.0	26.6
2X14	26.0	30.0	28.6
2X15	28.0	32.0	30.6
~	~	~	~
2X30	58.0	62.0	60.6

浙江乐马电气有限公司		设计	张书晨	
尺寸公差	角度公差	品名:	PHD-nY	审核
.X ±0.25	X.° ±3.0°	图号:	20004-Y	王佳
.XX ±0.15	.X° ±2.0°	批准	陈其林	
.XXX ±0.05	.XX° ±1.0°	单位:	mm	比例:
		页数:	1/1	版本:
				A