
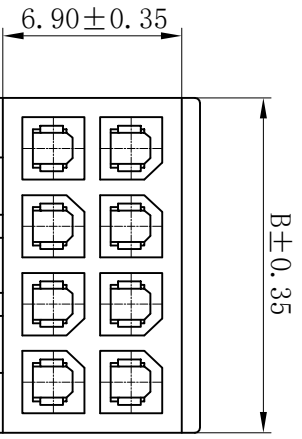


| | | |
|----|----|----|
| 版次 | 日期 | 内容 |
| | | |
| | | |

Electrical properties

- Current rating: 3.5A AC\DC
- Voltage rating: 250V AC\DC
- Temperature range: -25°C to 85°C
- Contact resistance: Initial value/20mΩ max
- Insulation resistance: 1000MΩ min
- Withstanding voltage: 1000V AC/ minute
- Material : Nylon UL94V-0(2)

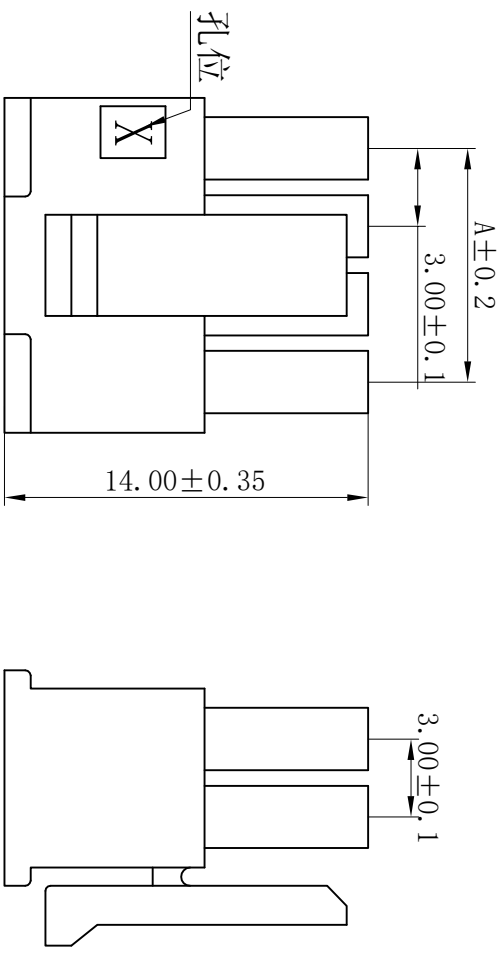

| 孔位 poles | A | B |
|-------------|------|------|
| 2 | -- | 3.9 |
| 4 | 3.0 | 6.9 |
| 6 | 6.0 | 9.9 |
| 8 | 9.0 | 12.9 |
| 10 | 12.0 | 15.9 |
| 12 | 15.0 | 18.9 |
| 14 | 18.0 | 21.9 |
| 16 | 21.0 | 24.9 |
| 18 | 24.0 | 27.9 |
| 20 | 27.0 | 30.9 |
| 22 | 30.0 | 33.9 |
| 24 | 33.0 | 36.9 |

浙江乐马电气有限公司

| | | | | | |
|------------|------------|-----|----------|-----|-----|
| 尺寸公差 | 角度公差 | 品名: | 43025-nY | 设计: | 张书晨 |
| .X ±0.25 | X.° ±3.0° | 图号: | 30001-Y | 审核: | 王佳 |
| .XX ±0.15 | .X° ±2.0° | 比例: | -- | 批准: | 陈其林 |
| .XXX ±0.05 | .XX° ±1.0° | 页数: | 1/1 | 版本: | A |
| | 单位: mm | | | | |